



PRODUCT INFO

Swivel clamp mountings LG are made of drawn aluminum profiles and have a slitted clamping point and a smooth clamping lug, both machined by cutting methods.


The lug is arranged perpendicular or parallel to the bore of the clamping point, which receives rods and tubes with round cross-sections or also square cross-sections via the optionally incorporated square bore.

For clamping, a socket cap screw DIN 912-A2-70 combined with the clamping thread reduces the bore cross-section. For regular tool-free clamping, adjustable hand lever sets are available as accessories under the designation HK.

Swivel clamp mountings LG can be combined with other swivel clamp mountings with identical k dimensions to create any kind of joint clamp mounting. Clamping kits HM are available, type S with a screw and type K with an adjustable hand lever.

The relevant dimensions for ordering the clamping kits are found in the dimensions table.

RoHS-compliant product

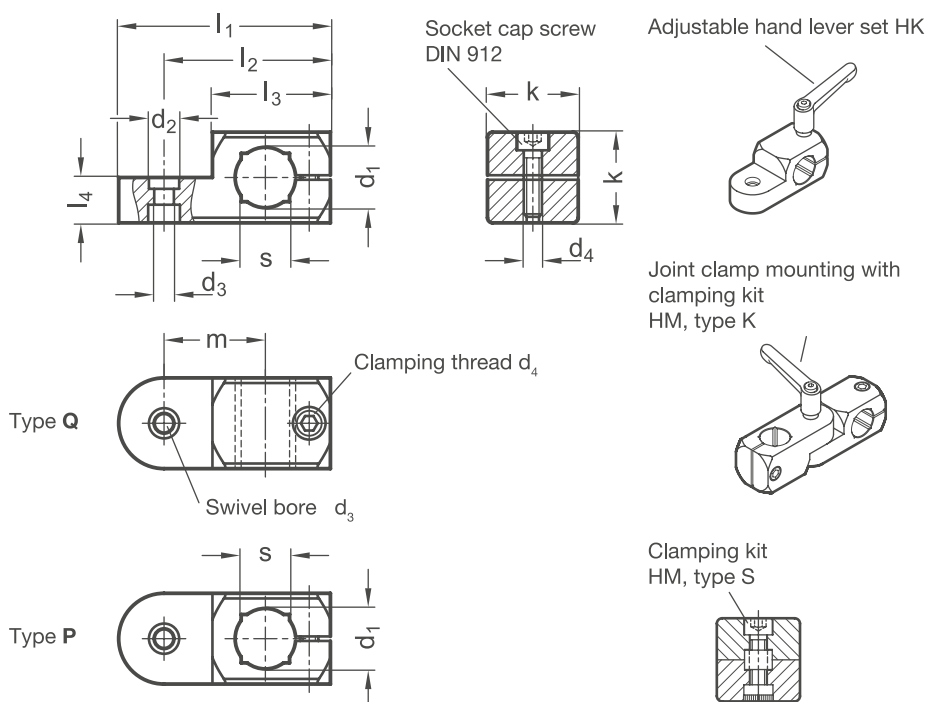


Clamping point												Accessories	
Bore d ₁	k	d ₂	Swivel bore d ₃	Clamping thread d ₄	l ₁	l ₂	l ₃	l ₄	m	Square s		Clamping kit HM for d ₃	Hand lever set HK for d ₄
B 8	16	7	4,5	M 4	40	32	23	8	18,5	-		M 4-16	M 4-16
B 10	20	8,5	5,5	M 5	50	40	29	10	23	8		M 5-20	M 5-20
B 12	20	8,5	5,5	M 5	50	40	29	10	23	10		M 5-20	M 5-20
B 15	25	10	6,5	M 6	62	49,5	36	12,5	29	12		M 6-25	M 6-25
B 16	25	10	6,5	M 6	62	49,5	36	12,5	29	-		M 6-25	M 6-25
B 20	30	10	6,5	M 6	70	55	39	15	33,5	16		M 6-30	M 6-30

Type t	
Q	Clamping bore perpendicular to the lug axis
P	Clamping bore parallel to the lug axis

Surface o	
G	Tumbled, matt
S	Anodized black

ORDER KEY

LG - d₁ - k - t - o

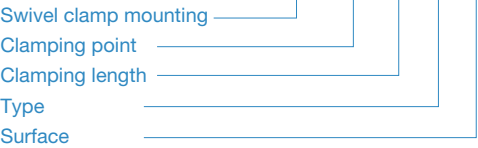

ACCESSORIES

- Clamping kit **HM** see page 174
- Adjustable hand lever set **HK** see page 172

ON REQUEST

- Clamping point with special diameter
- Screw point with hex head screw
- Surface anodized in colors