


## PRODUCT INFO

**Parallel clamp mountings PG** are made of drawn aluminum profiles and have slitted clamping points machined by cutting methods.

The bores at the clamping points are situated in a plane and are parallel to each other. They receive rods and tubes with round or square cross-sections via the additionally incorporated square bore.

For clamping, a stainless steel socket cap screw DIN 912-A2-70 combined with the clamping thread reduce the bore cross-section. For regular tool-free clamping, adjustable hand lever sets are available as accessories under the designation HK.

**RoHS-compliant product**

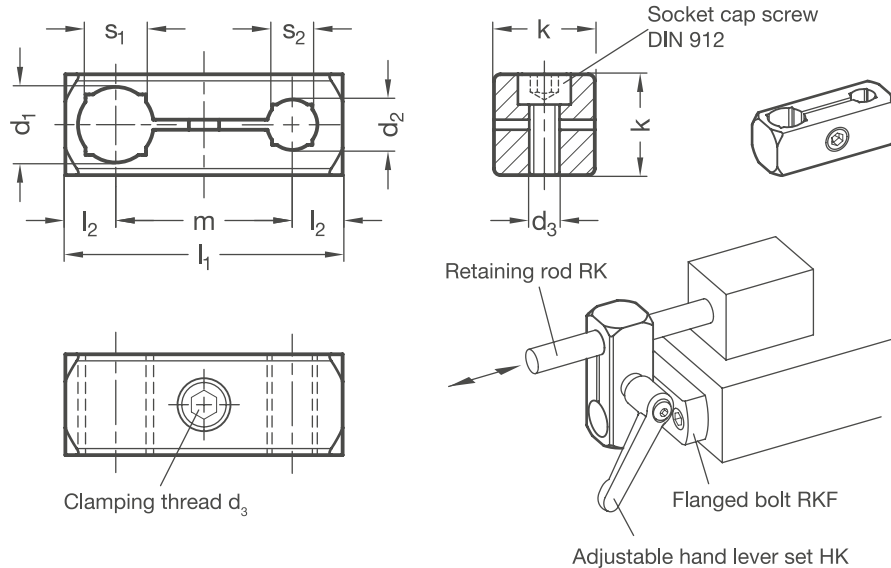

| Clamping point 1 | Clamping point 2 | Clamping thread |    |       |       |    |              |              | Accessories                 |
|------------------|------------------|-----------------|----|-------|-------|----|--------------|--------------|-----------------------------|
| Bore $d_1$       | Bore $d_2$       | $d_3$           | k  | $l_1$ | $l_2$ | m  | Square $s_1$ | Square $s_2$ | Hand lever set HK for $d_3$ |
| B 8              | B 8              | M 4             | 14 | 38    | 7     | 24 | -            | -            | M 4-14                      |
| B 10             | B 8              | M 5             | 16 | 44    | 8     | 28 | 8            | -            | M 5-16                      |
| B 10             | B 10             | M 5             | 16 | 44    | 8     | 28 | 8            | 8            | M 5-16                      |
| B 12             | B 8              | M 5             | 16 | 45    | 8     | 29 | 10           | -            | M 5-16                      |
| B 12             | B 10             | M 5             | 16 | 45    | 8     | 29 | 10           | 8            | M 5-16                      |
| B 12             | B 12             | M 5             | 16 | 45    | 8     | 29 | 10           | 10           | M 5-16                      |
| B 15             | B 10             | M 6             | 20 | 55    | 10    | 35 | 12           | 8            | M 6-20                      |
| B 15             | B 12             | M 6             | 20 | 55    | 10    | 35 | 12           | 10           | M 6-20                      |
| B 15             | B 15             | M 6             | 20 | 55    | 10    | 35 | 12           | 12           | M 6-20                      |
| B 16             | B 10             | M 6             | 20 | 55    | 10    | 35 | -            | 8            | M 6-20                      |
| B 16             | B 12             | M 6             | 20 | 55    | 10    | 35 | -            | 10           | M 6-20                      |
| B 16             | B 15             | M 6             | 20 | 55    | 10    | 35 | -            | 12           | M 6-20                      |
| B 16             | B 16             | M 6             | 20 | 55    | 10    | 35 | -            | -            | M 6-20                      |
| B 20             | B 12             | M 6             | 25 | 66    | 12,5  | 41 | 16           | 10           | M 6-25                      |
| B 20             | B 15             | M 6             | 25 | 66    | 12,5  | 41 | 16           | 12           | M 6-25                      |
| B 20             | B 16             | M 6             | 25 | 66    | 12,5  | 41 | 16           | -            | M 6-25                      |
| B 20             | B 20             | M 6             | 25 | 66    | 12,5  | 41 | 16           | 16           | M 6-25                      |


## Surface

O

|   |                |
|---|----------------|
| G | Tumbled, matt  |
| S | Anodized black |

## ORDER KEY

PG -  $d_1$  -  $d_2$  - o

Parallel clamp mounting 

Clamping point 1

Clamping point 2

Surface

## ACCESSORIES

– Adjustable hand lever set **HK** see page 172

## ON REQUEST

- Clamping points with special diameter
- Screw point with hex head screw
- Surface anodized in colors