

PRODUCT INFO


T-clamp mountings TG are made of drawn aluminum profiles and have a slitted clamping point machined by cutting methods.

The clamping point bore is T-shaped relative to the bolt and to the bore on the opposite side. It receives rods and tubes with round or square cross-sections via the additionally incorporated square bore.

T-clamp mountings of type W are suitable alternatives to swivel cross clamp mountings DGK if higher retaining torques are required.

For clamping, a stainless steel socket cap screw DIN 912-A2-70 combined with the clamping thread reduces the cross-section of the clamping point bore. For regular tool-free clamping, adjustable hand lever sets are available as accessories under the designation HK.

RoHS-compliant product

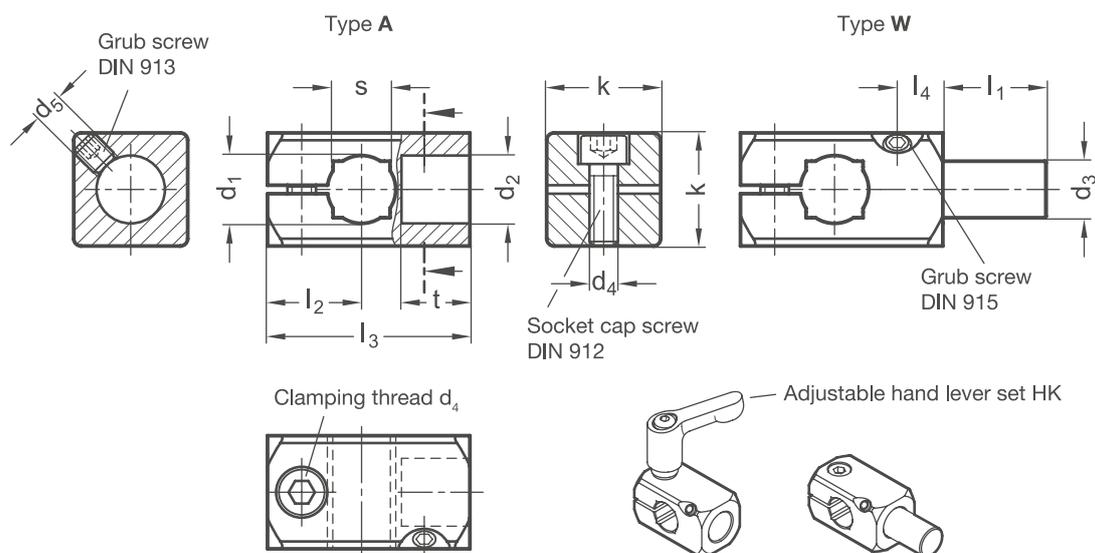


Clamping point												Accessories
Bore d_1	Type A d_2	Type W d_3	Clamping thread d_4	k	d_5	l_1	l_2	l_3	l_4	Square s	t	Hand lever set HK for d_4
B 8	B 8	8	M 4	16	M 4	16	13	26	5,5	-	8	M 4-16
B 10	B 10	10	M 5	20	M 5	17	15,5	31,5	7	8	10	M 5-20
B 12	B 12	12	M 5	20	M 5	19	16,5	35,5	8	10	12	M 5-20
B 15	B 15	15	M 6	25	M 6	21	20	43,5	10	12	15	M 6-25
B 16	B 16	16	M 6	25	M 6	24	20	45	11	-	16	M 6-25
B 20	B 20	20	M 6	30	M 6	26	22	51	12	16	18	M 6-30

Type t	
A	With bore
W	With bolt (stainless steel, AISI 303)

Surface o	
G	Tumbled, matt
S	Anodized black

ORDER KEY

TG - d_1 - d_2 / d_3 - t - o

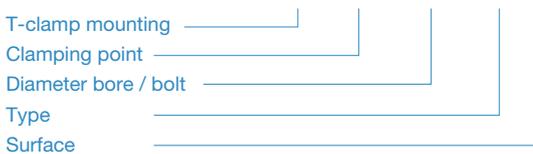

ACCESSORIES

- Adjustable hand lever set **HK** see page 172

ON REQUEST

- Clamping point with special diameter
- Screw point with hex head screw
- Surface anodized in colors

2D
2C
2B
2A
1D
1C
1B
1A